



FIG 2: European

FIG 1: American

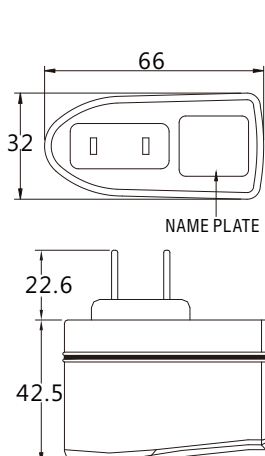


FIG 1: American

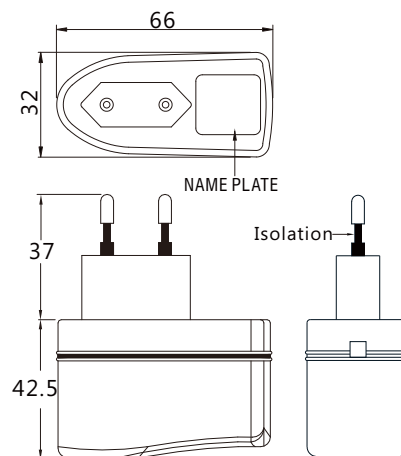


FIG 2: European

■Safety agency approvals:



FC CE CB LPS

■Specifications:

Model No.	GPSU06
AC input range	100~240VAC; 47~63Hz; 0.2A
Leakage current	0.25mA Max.@ 240VAC/50Hz
Operating temperature	-20°C to ~+70°C(safety approval 0°C to 40°C, >40°C please contact the sales request derating curve.)
Withstand voltage	4242VDC from input to output
EMC	(A)CE EN 55032,EN 55035 (B)FCC 47 CFR Part 15 Subpart B
Safety	(A) UL/cUL (B) TUV/PSE (C) CB
Warranty	1 year

■ X= U: (American type FIG 1) or E: (European type FIG 2)

Model name	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)	Ripple.(mV) max.	Line Regulation(%)	Load Regulation(%)	Avg.Eff.(%) DoE(VI)_CoC(4)	No load Power Consumption(W)	Measured at the output of
GPSU06X-0	3~5	1.33~0.80	4	100	± 1	± 7	>66.5	<0.3	3.3
Model name	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)	Ripple.(mV) max.	Line Regulation(%)	Load Regulation(%)	Avg.Eff.(%) DoE(VI)_CoC(5)	No load Power Consumption(W)	Measured at the output of
GPSU06X-1	5~6	1.20~0.80	6	75	± 1	± 5	>75.0	<0.1	5
GPSU06X-1-1	6~8	1.00~0.75	6	80	± 1	± 5	>78.88	<0.1	7.5
GPSU06X-2	8~11	0.75~0.54	6	80	± 1	± 5	>78.88	<0.1	9
GPSU06X-3	11~13	0.54~0.46	6	100	± 1	± 5	>78.88	<0.1	12
GPSU06X-4	13~16	0.46~0.37	6	120	± 1	± 5	>78.88	<0.1	15
GPSU06X-5	16~21	0.37~0.28	6	150	± 1	± 5	>78.88	<0.1	18
GPSU06X-6	21~27	0.28~0.21	6	180	± 1	± 5	>78.88	<0.1	24
GPSU06X-7	27~33	0.21~0.18	6	200	± 1	± 5	>78.88	<0.1	28
GPSU06X-8	33~58	0.18~0.12	6	200	± 1	± 5	>78.88	<0.1	48

Note:

1.Weight: Approx 70~100gs

2.Optional output connectors (See appendix A)

3.Avg. Eff.(%): Averages the efficiency at 25, 50, 75, and 100 % of max. rated output current.

4.Standard Output cable: **3~11V**: UL2468, 20AWG, 4FT; **11~58V**: UL2468, 24AWG, 6FT