


CLA3060 Desktop charger series



UNIT:mm



■ Safety agency approvals:

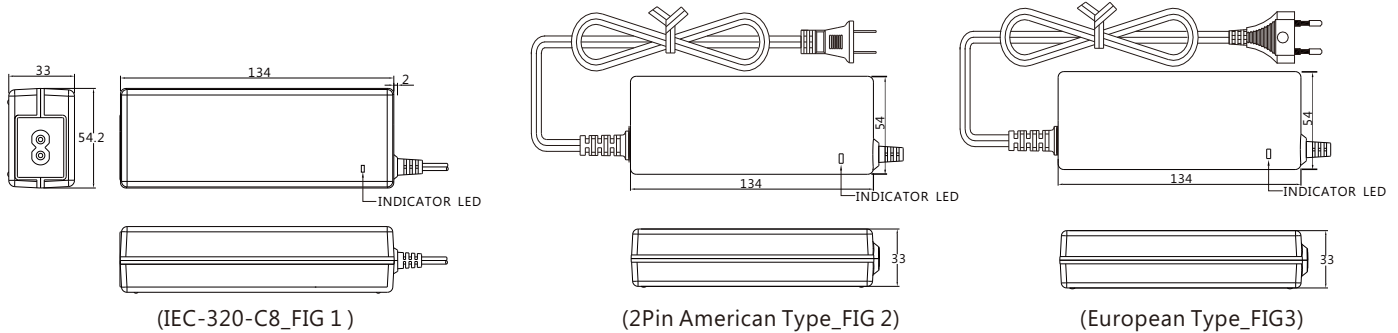

< Pending >

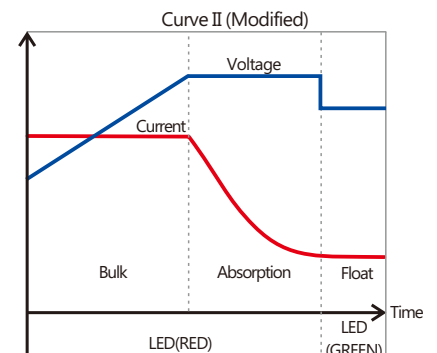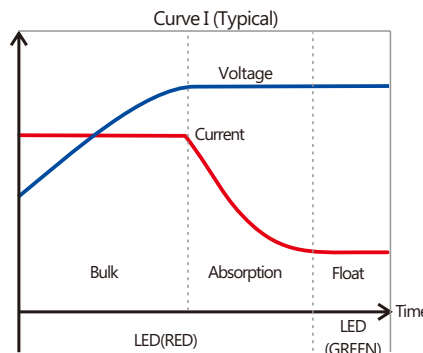

■ Specifications:

Model No.	CLA3060
AC input range	100~240VAC; 47~63Hz; 1.5~0.8A
Leakage current	0.25mA Max.@ 240VAC/50Hz
Operating temperature	-20°C to ~+70°C(safety approval 0°C to 40°C, >40°C please contact the sales request derating curve.)
Withstand voltage	4242VDC from input to output
EMC	(A)CE EN55032, EN55035 (B)FCC 47 CFR Part 15 Subpart B
Safety	(A) UL/cUL (B) TUV/GS (C) TUV/PSE (D)CB
Warranty	3 years (8 hours/ day)

■ X = B: (IEC-320-C8 FIG 1) or U: (2Pin American Type FIG 2) or E: (European Type FIG3)

Model name	Output Voltage(VDC)	Max.Charging Current(A)	Max.Output power(W)	Eff at 230VAC 90% Load(TYP)	No load Power Consumption(W)	Measured at the output of
CLA3060X-2	8~11	5.63~5.00	55	84	<0.5	8.4
CLA3060X-3	11~13	5.00~4.62	60	86	<0.5	12
CLA3060X-4	13~15	4.62~3.75	60	86	<0.5	14.3
CLA3060X-5	15~21	3.75~2.86	60	86	<0.5	16.8
CLA3060X-6	21~27	2.86~2.23	60	86	<0.5	25.2
CLA3060X-7	27~33	2.23~1.82	60	86	<0.5	28.6
CLA3060X-8	33~50	1.82~1.04	60	86	<0.5	42

Note:

1.Weight: Approx

2.Optional output connectors (See appendix A)

3.Standard Output cable: 8~13V: UL2468, 16AWG 1M ; 13~21V: UL2468, 20AWG,6FT ; 21~50V: UL2468, 24AWG, 6FT