


GLV30 30W LED driver wall mount interchangeable series (CV mode)

UNIT:mm



■Safety agency approvals:

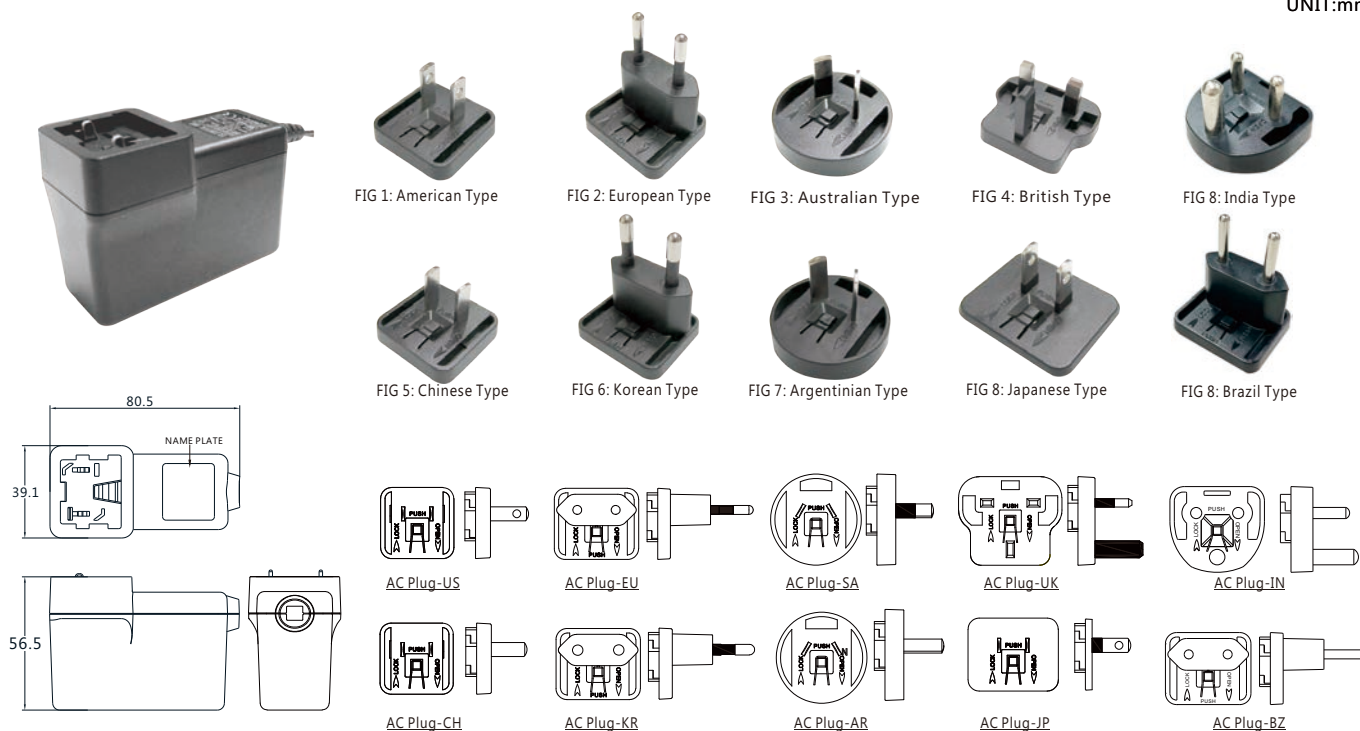

■Specifications:

Model No.	GLV30
AC input range	100~240VAC; 47~63Hz; 0.5A
Leakage current	0.25mA Max.@ 240VAC/50Hz
Operating temperature	-20°C to ~+70°C(safety approval 0°C to 40°C, >40°C please contact the sales request derating curve.)
Withstand voltage	5300VDC from input to output
EMC	CE EN 55015, EN 61547
Safety	LVD EN61347-1, EN61347-2-13
Warranty	2 year

■ **X = UI:** (American type FIG 1) or **EI:** (European type FIG 2) or **SAI:** (2pin Australian type FIG 3)
or **BSI:** (British type FIG 4) or **CHI:** (Chinese type FIG 5) or **KRI:** (Korean type FIG 6)
or **ARI:** (Argentinian type FIG 7) or **JPI:** (Japanese type FIG 8) or **BZI:** (Brazil type FIG 9)
or **INI:** (India type FIG 10)

Model name	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)	Ripple (Vp-p)	Line Regulation(%)	Load Regulation(V)	Eff. at 230VAC,full load(%)	No load Power Consumption(W)
GLV30X-1	5	3.5	17.5	1.5	±2	±1	>75	<0.5
GLV30X-3	12	2.5	30	2.5	±1	±1.5	>80	<0.5
GLV30X-6	24	1.25	30	3.5	±1	±2	>85	<0.5
GLV30X-8	48	0.625	30	4.5	±1	±4	>85	<0.5

Note:

1.Weight: Approx 120~150gs

2.Optional output connectors (See appendix A)

3.Standard Output cable: **5V:** UL2468, 18AWG, 1.5M; **12V,24V:** UL2468, 22AWG, 1.5M; **48V:** UL2468, 24AWG, 1.5M