


GLV60 60W LED driver wall mount interchangeable series (CV mode)

UNIT:mm



■Safety agency approvals:

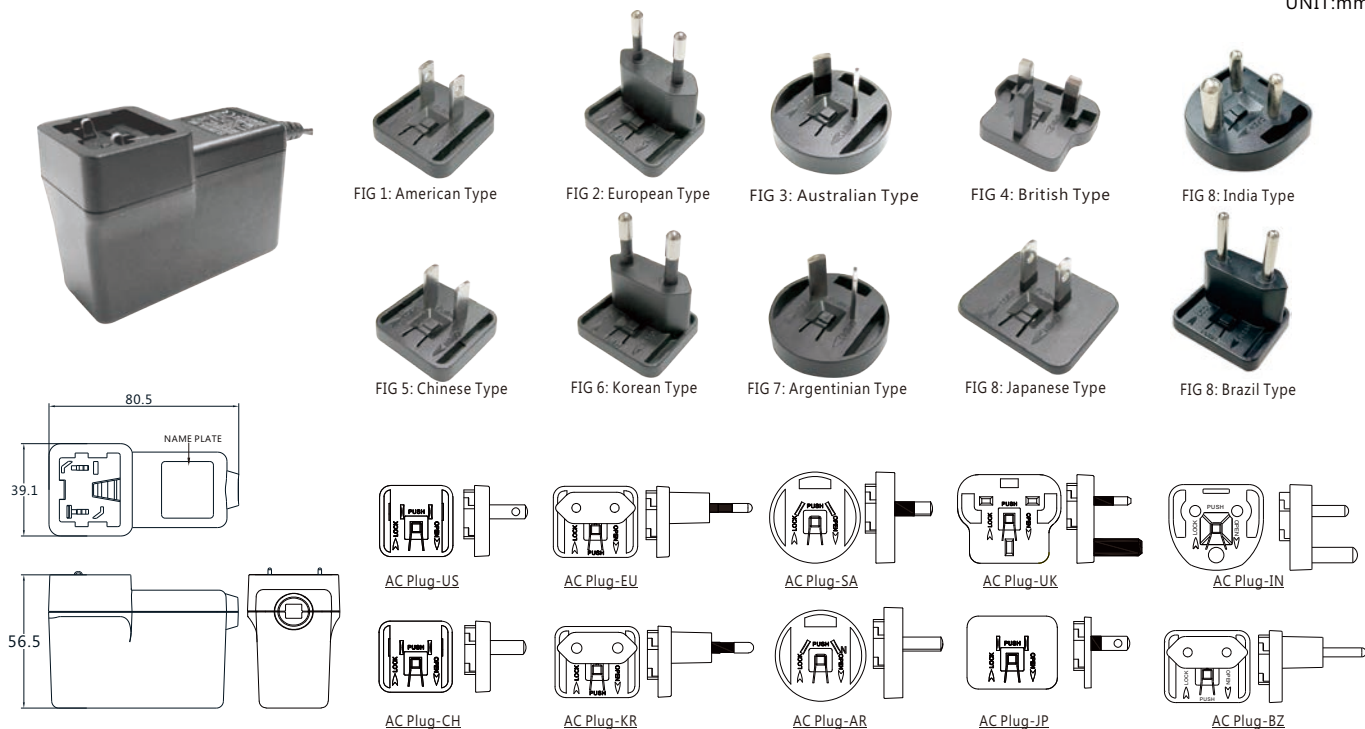

■Specifications:

Model No.	GLV60
AC input range	200~240VAC; 47~63Hz; 0.5A
Leakage current	0.25mA Max.@ 240VAC/50Hz
Operating temperature	-20°C to ~+70°C(safety approval 0°C to 35°C, >35°C please contact the sales request derating curve.)
Withstand voltage	5300VDC from input to output
EMC	CE EN 55015, EN 61547
Safety	LVD EN61347-1, EN61347-2-13
Warranty	2 year

■ **X** = **UI**: (American type FIG 1) or **EI**: (European type FIG 2) or **SAI**: (2pin Australian type FIG 3)
or **BSI**: (British type FIG 4) or **CHI**: (Chinese type FIG 5) or **KRI**: (Korean type FIG 6)
or **ARI**: (Argentinian type FIG 7) or **JPI**: (Japanese type FIG 8) or **BZI**: (Brazil type FIG 9)
or **INI**: (India type FIG 10)

Model name	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)	Ripple (Vp-p)	Line Regulation(%)	Load Regulation(V)	Eff. at 230VAC,full load(%)	No load Power Consumption(W)
GLV60X-3	12	4.16	50	2.5	±1	±1.5	>80	<0.5
GLV60X-6	24	2.5	60	4	±1	±2.25	>85	<0.5
GLV60X-8	48	1.25	60	5.5	±1	±4.5	>85	<0.5

Note:

1.Weight: Approx 160~190gs

2.Optional output connectors (See appendix A)

3.Standard Output cable: **5V**: UL2468, 18AWG, 1.5M; **12V**: UL2468, 20AWG, 1.5M; **24V**: UL2468, 22AWG, 1.5M; **48V**: UL2468, 24AWG, 1.5M